

G-COMIN

PT-200H

A New Remote Lighting Experience:
Illuminate Your Space at Will

Portable
Pan-tilt
Light



STABLE, EFFICIENT, AND MORE CONVENIENT TO USE.

Expanding or requires just two steps and can be completed in 10 seconds.




1 Release the legs



2 Release and rise the extension pole





One-click release or lock of the legs.



Secure the light at any height with the buckle.

Ground pegs are available to secure the light tower, providing wind and vibration resistance. (Optional)

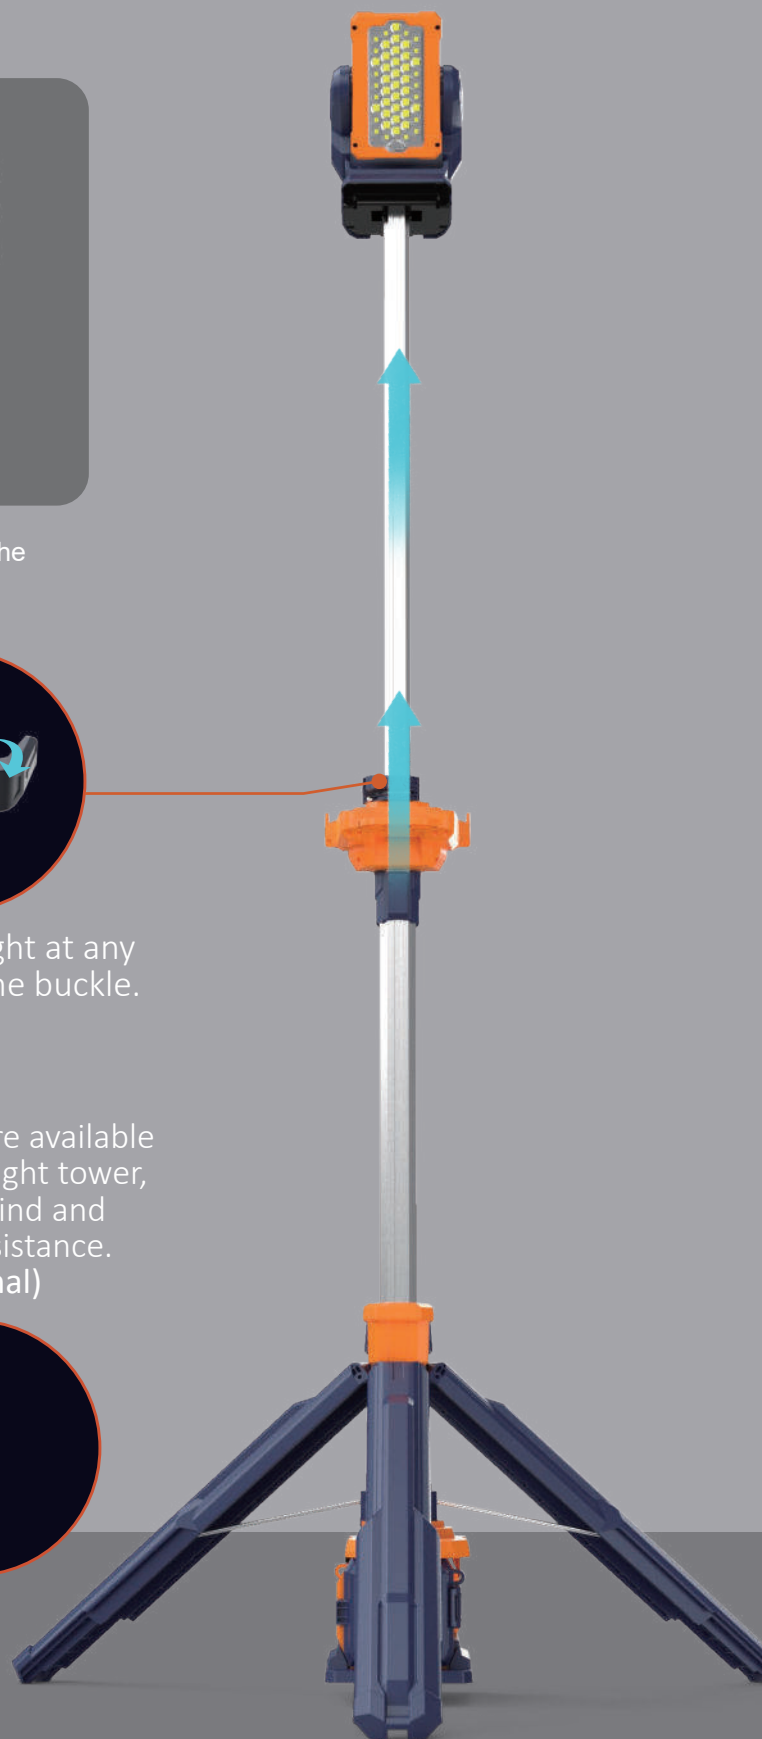

HUMANIZED DESIGN HIDDEN IN THE DETAILS



30 Meters Remote Range

Remote control for adjusting the light head.



Phone Stand

Continue working while charging, the hook here can serve as a phone stand.



Car Charger

Use the CC-3 car charger to charge the PT-200H in the car.



REMOTE CONTROL DESIGN FOR INCREASED WORK EFFICIENCY.



360-DEGREE HORIZONTAL ROTATION

Rotate freely in 360 degrees horizontal direction, instantly rotate/stop with remote commands.



180-DEGREE VERTICAL ROTATION

Rotates up to 180 degrees up and down, precisely pointing to any target position.



LOWER CENTER OF GRAVITY GREAT- ER STABILITY.

Ultra-low center of gravity combined with extended legs effortlessly handles strong winds and slopes.



ULTRA-LONG WORKING HOURS

Standard Mode Up To

D24-100 x 2

8+ Hours

3 Levels of Brightness (D24-100x2)

Eco

Standard

Turbo

38h

8.7h

5h



Battery compartment fits
two replaceable battery packs.

HIGH LIGHT EFFICIENCY ILLUMINATING A WIDER SPACE

Equipped with high-brightness LED light source and high-quality optical lens system

Three lighting modes to choose from



Distance Mode



Midrange Mode




Close-range Mode

Battery-powered
Up To

12,000 LM

Battery (3 Mode)

Eco	12,00LM
Standard	6,500LM
Turbo	12,000LM

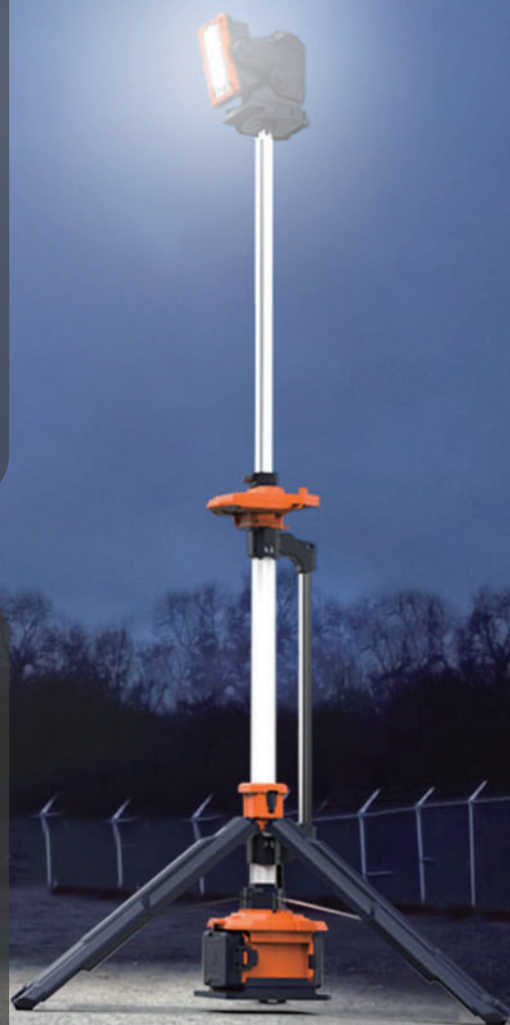



MULTI-DEVICE NETWORK NO SHADOWS!

Multiple units can be controlled with single operator, offering shadow-free illumination and adjustable angles for different work areas.




Long distance

Ultra-high brightness focused lighting.

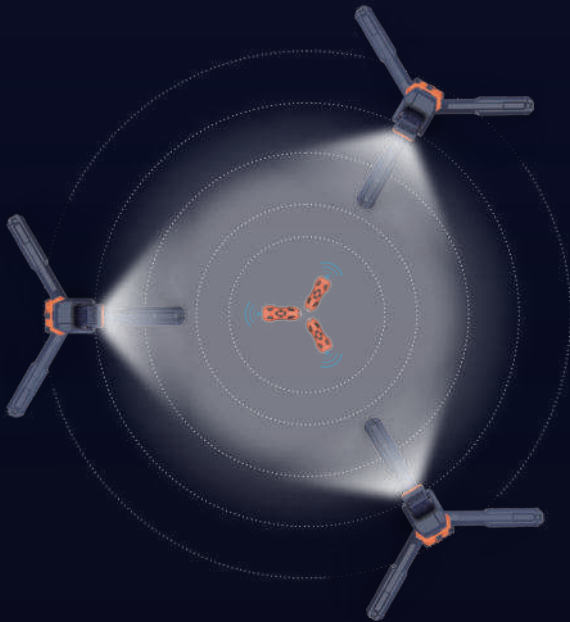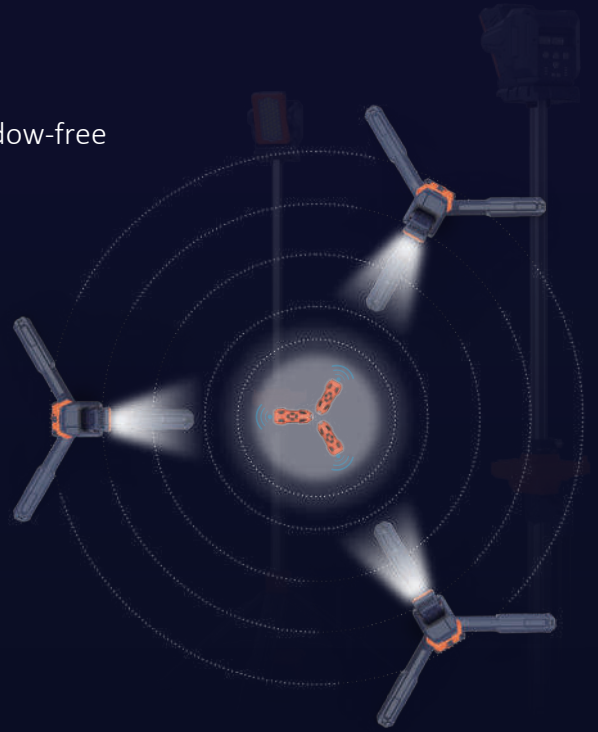


Medium distance

Balancing illumination distance and brightness.

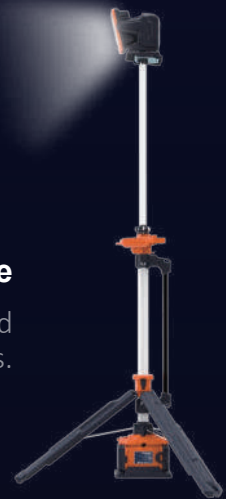

Short distance

Wide-area lighting coverage.

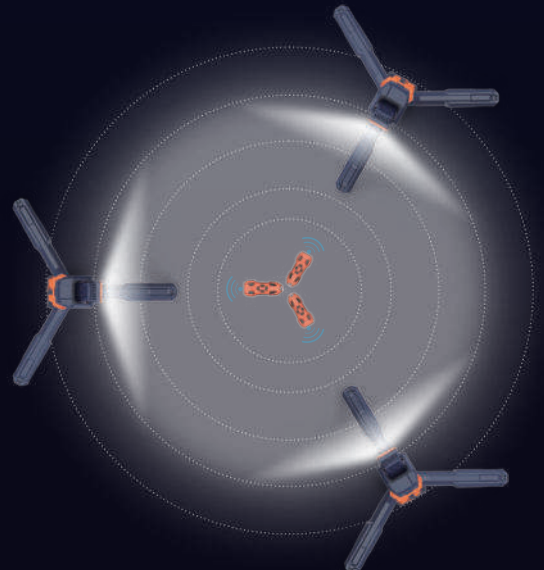



Construction



Emergency



Military



Railway



Mining



Highway



Heavy lifting



Electric power

Designed for single-person operation

Easy to grip and move,
weight **9.7 kg** excluding battery pack.



2.3m



1.44m




Specifications

PT-200H

Height	1.44~2.3m
Weight	9.7KG (Fitting only)
Power Supply	D24 series battery pack
Lumens	0-12000Lm
Run Times	>8.7h (D24-100 x 2)
IP Grade	IP66
Output(USB)	5V 2A
Operating Temp	-10℃~50℃



Size (mm)

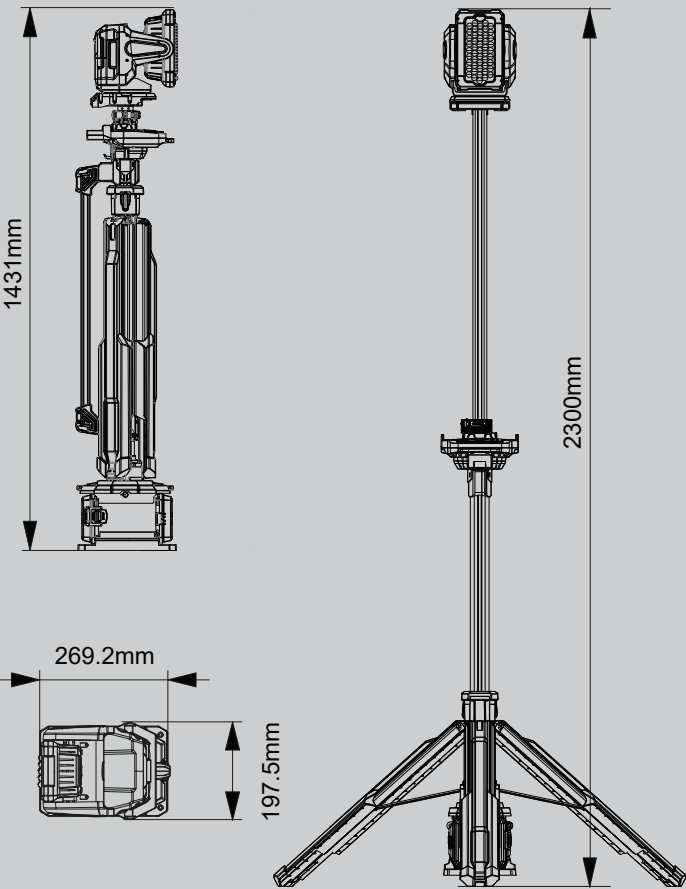

Package

Model	PT-200H
Size of Carton	1550x270x360mm
Gross Weight of Carton	13KG
PCS/Carton	1



PROMECTUM SWEDEN LIGHT

Tel: +46-070-550 20 96

Web: www.promectum.se

E-mail: info@promectum.se

Furunäsvägen 8 , 941 51 Piteå

G-COMIN